

# Technical Data Sheet

CODE 26025

## DEUMIDO 10 EVO

Portable dehumidifiers




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Voltage (V)	220-240
Max absorbed current (A)	1,50	Weight (Kg)	10,5
Max absorbed power (W)	290	Dehumidification capacity (30 °C; 80% R.H.) (l/24h)	10
Refrigerant charge (g)	35	Max airflow (l/s)	36
Refrigerant gas	R290	Max airflow (m <sup>3</sup> /h)	130
Tank capacity (l)	2,5	Sound pressure level at 1m Lp [dB (A)]	42,2

### DIMENSIONS

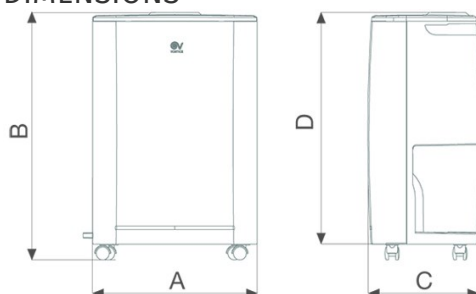

Size A (mm)	300
Size B (mm)	452
Size C (mm)	204
Size D (mm)	425

#### PER INFORMAZIONI:

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** prevendita@vortice-italy.com

# Technical Data Sheet

CODE 26025

## DEUMIDO 10 EVO


Portable dehumidifiers



### DESCRIPTION

- Outer casing moulded from ABS thermoplastic resin.
- Water tank moulded from translucent ABS, capacity 2,5 liters.
- Rotary compressor with protection device timed to delay restart by 3 minutes after each shutdown.
- Humidistat allowing preselection of residual moisture level in the room (40%, 50%, 60%, 70% or CONTINUOUS).
- Antifreeze thermostat designed to prevent icing, thereby allowing operation even at low temperatures.
- Removable and washable dust filter to prevent the growth of bacteria and to capture airborne dust particles.
- Activated carbon filter able to keep bad smells.
- Electronic control panel that allows:
  - To switch on/off the unit,
  - To set the relative humidity threshold (40%, 50%, 60% or 70%),
  - To set Timer for the delayed automatic switching off (the delay can be set up to 15 hours).
- Set of indicator lights designed to show:
  - The operating status of the appliance,
  - The functioning mode (RH level or continuous functioning status),
  - The system lockout triggered when water of condensation reaches the maximum limit in the collection tank,
  - The duration of Timer setting.
- A pair of handles and 4 wheels allow an easier repositioning even at full tank.
- It contains R290 gas.
- Hermetically sealed equipment.

### ACCESSORIES



#### **FILTRO AI CARBONI ATTIVI FSEK10**

Code 21018

#### **PER INFORMAZIONI:**

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** prevendita@vortice-italy.com