

Technical Data Sheet

CODE 26027

DEUMIDO 20 EVO

Portable dehumidifiers




Certifications



TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Voltage (V)	220-240
Max absorbed current (A)	2,2	Weight (Kg)	13,5
Max absorbed power (W)	390	Dehumidification capacity (30 °C; 80% R.H.) (l/24h)	20
Refrigerant charge (g)	70	Max airflow (l/s)	44
Refrigerant gas	R290	Max airflow (m ³ /h)	160
Tank capacity (l)	3	Sound pressure level at 1m Lp [dB (A)]	45,8

DIMENSIONS

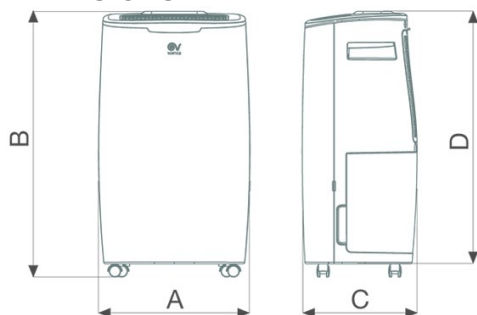

Size A (mm)	310
Size B (mm)	547
Size C (mm)	236
Size D (mm)	523

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 26027

DEUMIDO 20 EVO


Portable dehumidifiers



DESCRIPTION

- Outer casing moulded from ABS thermoplastic resin.
- Water tank moulded from translucent ABS, capacity 3 liters.
- Rotary compressor with protection device timed to delay restart by 3 minutes after each shutdown.
- Two operating speeds.
- Humidistat allowing preselection of residual moisture level in the room (40%, 50%, 60%, 70% or CONTINUOUS).
- Antifreeze thermostat designed to prevent icing, thereby allowing operation even at low temperatures.
- Removable and washable dust filter to prevent the growth of bacteria and to capture airborne dust particles.
- Activated carbon filter able to keep bad smells.
- Electronic control panel that allows:
 - To switch on/off the unit,
 - To set the relative humidity threshold (40%, 50%, 60% or 70%),
 - To set Timer for the delayed automatic switching off (the delay can be set up to 24 hours),
 - To set the fan speed,
 - To set TURBO mode,
 - To modify the environment data shown on display.
- Set of indicator lights designed to show:
 - The operating status of the appliance,
 - The functioning mode (RH level or continuous functioning status),
 - The system lockout triggered when water of condensation reaches the maximum limit in the collection tank,
 - The duration of Timer setting,
 - The TURBO mode functioning.
- A pair of handles and 4 wheels allow an easier repositioning even at full tank.
- It contains R290 gas.
- Hermetically sealed equipment.

ACCESSORIES



**FILTRO AI
CARBONI
ATTIVI
FSEK1420**

Code 21019

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com