



MICRORAPID® RANGE

Compact wall-mounted fan heaters

Fan heaters for wall installation, designed to effectively and safely (even in the presence of risks of direct contact with water) guarantee the necessary heat intake in domestic or commercial premises, even where there is no primary heating system.

- Very low noise emissions, thanks to the tangential fans used. Their automatic shut-down in use at minimum power, which involves substantially zeroing sound emissions, makes them perfect for use at night.
- High protection rating from water, compatible with Zone 1 bathroom installation.
- Flexible installation, thanks to their reduced thickness.
- Design: F. Trabucco & Associates.

Note: For full compliance with European Regulation No. 1188/2015, this product must be subjected to an external control device that regulates heat emission in the room where it is installed.

Lit controls for digital daily/weekly programming (timer model), protected by a liftable door.



TECHNICAL FEATURES

- 8 models, different in size and heat output, also in versions with daily and weekly programmer.
- Scratch-resistant painted steel enclosure, colour grey.
- Flanks and housing controls made of self-extinguishing plastic resin, colour grey.
- Tangential fan unit to keep sound emissions down.
- Metal-clad heating element with aluminium fins, protected by a manually resettable thermal overload limiter.
- Lit switches for on/off control and selection of power output and timer mode operating setting (MICRORAPID V0 T).
- Room thermostat with antifreeze function, guaranteeing automatic activation of the fan heater whenever ambient temperature drops below 5 °C.
- Daily and weekly electronic programmer complete with LCD display to set on and delayed shut-down of the product (MICRORAPID V0 T). Can also control MICRORAPID range devices through an external programmable thermostat, pre-existing and/or available separately from the product.
- Safety certified by third party body (CE).
- Protection rating from dust and water: IPX4 (suitable for installation in bathroom Zone 1).
- Class of electric isolation: I (earthing required).






MICRORAPID® RANGE

Compact wall-mounted fan heaters

TECHNICAL DATA

PRODUCTS	CODES		V~50HZ	W	A	KG
	BASIC	TIMER				
MICRORAPID 600 V0	70602	70653	230	300/600	2.6	3.0
MICRORAPID 1000 V0	70612	70661	230	500/1000	4.3	3.7
MICRORAPID 1500 V0	70622	70663	230	500/1000/1500	6.5	3.8
MICRORAPID 2000 V0	70632	70681	230	800/1200/2000	8.7	4.2

DIMENSIONS

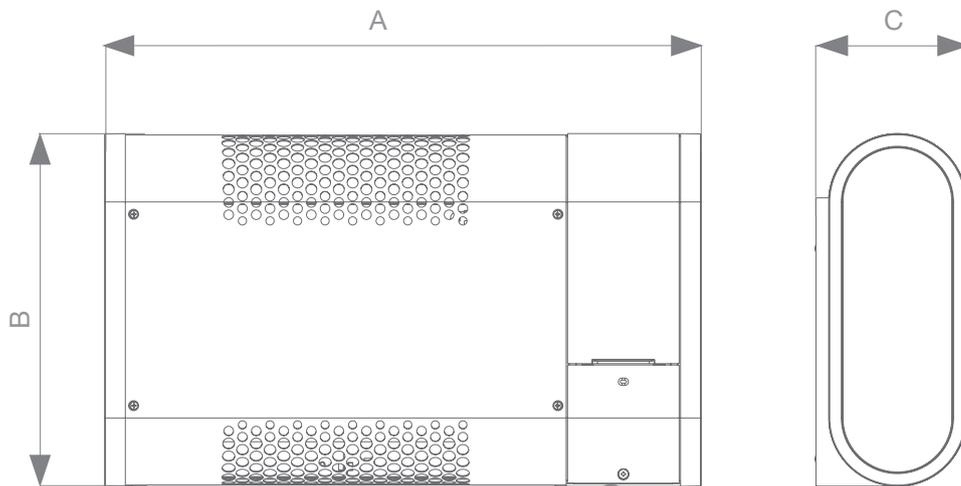

PRODUCTS	A	B	C
MICRORAPID 600 V0	433	258	109
MICRORAPID 1000 V0	503	258	109
MICRORAPID 1500 V0	573	258	109
MICRORAPID 2000 V0	633	258	109

Dimensions in mm