



PREMIUM RANGE

Automatic and manual hand dryers

Automatic and manual highly reliable, virtually maintenance-free and stylish design wall-mounted hand dryers with low delivered air temperature, especially suitable for installation in heavy duty use public areas (schools, nurseries, etc.).

- Low noise emissions.
- Compliant with the requirements of European Regulation No. 1275/2008/EU



PREMIUM DRY A cod. 19224

Automatic models are fitted with an infrared device which starts the product automatically when hands enter the sensor detection field, which can be adjusted using a "trimmer" inside the product.



The manual version is button-activated. Air delivery can be programmed to operate from 20 to 60 seconds.



PREMIUM DRY cod. 19225

TECHNICAL FEATURES

- 2 models: automatic and manual.
- Front covers made of white shock-proof plastic resin (ABS) with anti-UV treatment.
- Wall flange incorporating the grille for hot air outlet, moulded in plastic resin with a mineral-based additive to dampen vibrations and soften noise.
- Thermally protected induction motors with shafts mounted on ball bearings paired with a centrifugal impeller.
- Heating elements protected with thermal fuse and resettable thermal cut-out.
- Manual start-up PREMIUM DRY model equipped with an electronic timer for automatic product shut-off after a period of time that can be programmed during installation to operate from 20 to 60 seconds.
- Automatic start-up PREMIUM DRY A model can be activated via an infrared device. Activation distance can be adjusted using a trimmer inside the product during installation from 0 to 35 cm. Automatically shuts off when the sensor is accidentally or intentionally blocked, after 10' of continuous operation.
- Dust filters.
- Safety certified by third party entity (CE).
- Protection rating from dust and water: IPX4.
- Class of electrical insulation: II (earthing not required).






PREMIUM RANGE

Automatic and manual hand dryers

TECHNICAL DATA

MODELS	CODE	V~50/60HZ	W TOTAL	W MOTOR	A MAX	MAX AIRFLOW		Lp dB(A) 1 m	W STAND-BY	IK	KG
						m ³ /h	l/s				
PREMIUM DRY A	19224	220-224	1350	45	5.5	120	35	55.2	0.4550	9	2.3
PREMIUM DRY	19225	220-224	1350	45	5.5	130	35	55.2	0.4060	9	2.3

DIMENSIONS

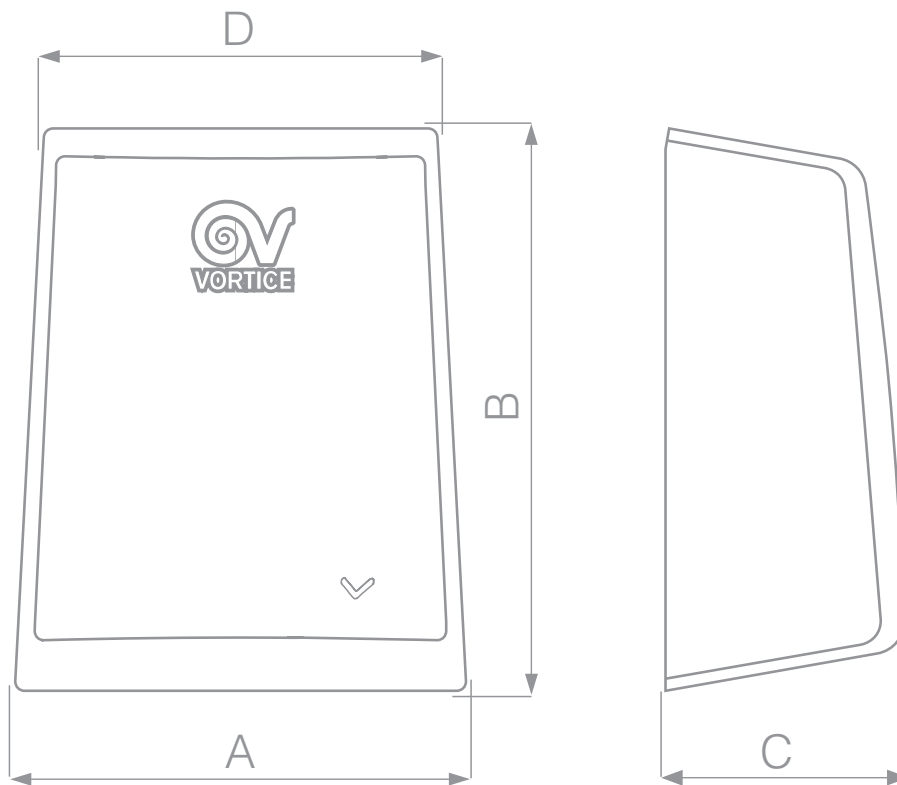

MODELS	CODE	A	B	C	D
PREMIUM DRY A	19224	253	319	137	220
PREMIUM DRY	19225	253	319	137	220

Dimensions (mm)