



# SOAP AND GEL DISPENSER RANGE

SOAP AND GEL DISPENSER

**NEW**

Wall-mounted automatic electric soap dispenser, perfect complement to VORTICE hand dryers.

• 2 models



They do not turn yellow over time

Soap or gel level indicator.



**S&G DISPENSER** code 19238  
(automatic soap or gel dispenser)

**PREMIUM S DISPENSER** code 19228  
(automatic soap dispenser)

Infrared sensor that is automatically activated when hands get close, with the possibility of adjusting the range of action of the detectors through a "trimmer" inside the product (0-35 cm).



Drip collector




## BENEFITS FOR THE INSTALLER

- Easy installation.
- Reliability, quality and safety.
- Easy maintenance.

## BENEFITS FOR THE USER

- Reliability, quality and safety.
- Low maintenance costs.
- Intensive use.
- Design that can be integrated in any environment due to its small size. It does not take up space on the sink.
- Easily checkable soap and gel level.
- Possibility to set the dispensed dose of liquid soap and gel at installation, avoiding waste.
- Maximum hygiene guaranteed - it is activated without touching anything, only with the hand placement.

## DIMENSIONS

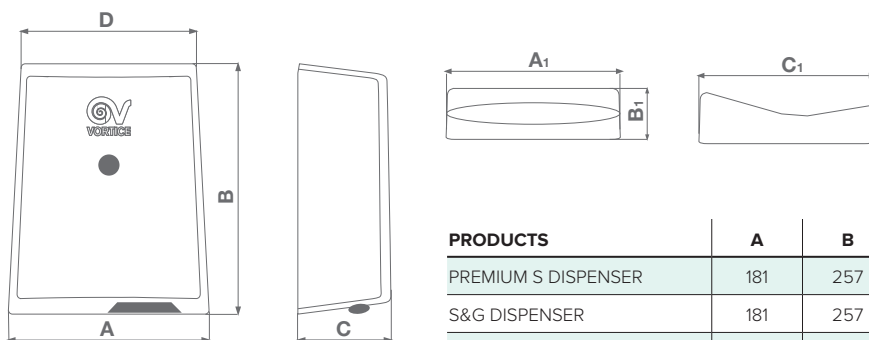

Dimensions (mm)

PRODUCTS	A	B	C	D	A <sub>1</sub>	B <sub>1</sub>	C <sub>1</sub>
PREMIUM S DISPENSER	181	257	91	159	-	-	-
S&G DISPENSER	181	257	91	159	-	-	-
DRIP COLLECTOR	-	-	-	-	135	50	135





# SOAP DISPENSER RANGE

## SOAP DISPENSER

### TECHNICAL DATA

PRODUCTS	CODE	V~50/60HZ	W MAX	SOAP CONTAINER CAPACITY Lt	W STAND-BY	IK	KG
PREMIUM S DISPENSER	19228	220-240	6	0.50	0.3838	9	1.2
S&G DISPENSER	19238	220-240	6	0.50	0.3838	9	1.2

### TECHNICAL FEATURES

- **2 models.**
- **Front cover** in white plastic resin (**ABS**), **resistant to impacts** and aging caused by possible sun exposure.
- Wall flanges in plastic resin.
- Peristaltic pumps for soap and gel dispensing.
- **Automatic operation:** the control electronics integrate an **infrared sensor** that detects hand presence in the area below the appliance and starts dispensing liquid soap or gel. **The activation distance** of the sensor can be **set** at installation through an internal trimmer.
- Liquid/gel soap **container removable** for **easier maintenance**.
- **Drip tray** included in the package.
- Overflow-proof design: the components protecting the internal electrical contacts prevent the risk of short circuits even in the event of an excessive filling of the soap or gel tray.
- Safe use certified by a third party **IMQ** (®).
- **Degree of protection** from dust and water: **IPX4**.
- Electrical insulation class: II (grounding not required).

