

ELXd – Dimmable for TC-F, TC-L Lamps

Electronic built-in ballasts

Casing: metal

Dimming range:

approx. 1–100% of lamp power

Power factor: ≥ 0.95 at 100% operation

DC voltage

for operation: 154–276 V (M22, M23, M24)

for operation: 176–264 V (M9)

for ignition: 198–264 V

Push-in terminals: 0.5–1 mm²

For the automatic luminaire wiring:

IDC terminals for leads H05V-U 0.5

RFI-suppressed

For luminaires of protection class I

Degree of protection: IP20


Fixing holes for screws M4

for lateral or base mounting


For lighting systems with
high switching frequency (> 5/day)

EOL shut down approved acc. to EN 61347 Test 2


M9

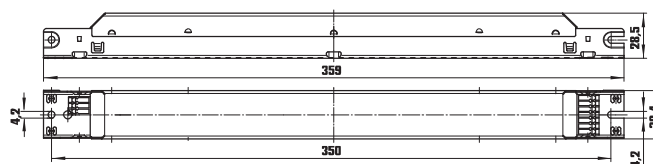

M23

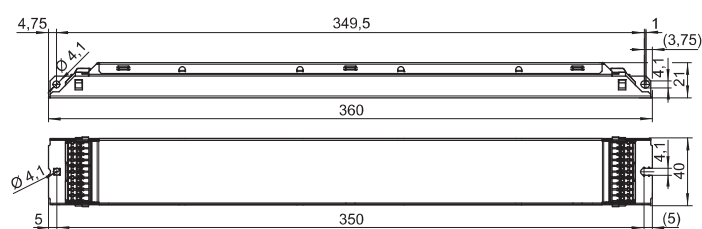

M22/M24

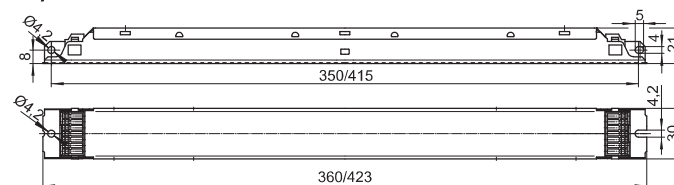

1

2

3

4

5

6

7

8

9

10