
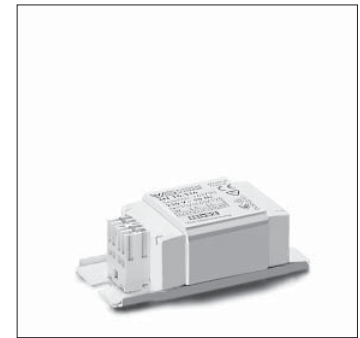


## Standard Ballasts 4–13 W 230/240/220 V

For fluorescent lamps  
Shape: 28x41 mm

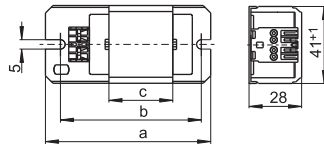

Vacuum-impregnated with polyester resin  
Push-in terminal for leads: 0.5–1 mm<sup>2</sup>  
For the automatic luminaire wiring:  
IDC terminals for leads H05V-U 0.5  
tw 130  
Protection class I

Lamp				Ballast										Capacitor	
Output	Type	Base	Current	Type	Ref. No.	Voltage	a	b	c	Weight	Δt/Δtan.	Energy efficiency	C <sub>p</sub>	Current	
W			mA			V, Hz	mm	mm	mm	kg	K		μF	mA	
<b>230 V, 50 Hz</b>															
4	T5 (T16)	G5	170	L4/6/8.304*	<b>163683</b>	230, 50	85	75	34	0.32	55/85	B2	2.0	40	
2x4	T5 (T16)	G5	155	L4/6/8.304*	<b>163683</b>	230, 50	85	75	34	0.32	55/85	B1	2.0	50	
6	T5 (T16)	G5	160	L4/6/8.304*	<b>163683</b>	230, 50	85	75	34	0.32	55/85	B1	2.0	50	
2x6	T5 (T16)	G5	175	LN 13.313*	<b>163711</b>	230, 50	85	75	34	0.32	55/80	B1	2.0	65	
8	T5 (T16)	G5	145	L4/6/8.304*	<b>163683</b>	230, 50	85	75	34	0.32	55/85	B1	2.0	60	
2x8	T5 (T16)	G5	155	LN 13.044	<b>564190</b>	230, 50	155	140	92	0.80	25/40	<b>A2</b>	2.0	80	
				LN 13.313*	<b>163711</b>	230, 50	85	75	34	0.32	55/80	B1	2.0	85	
13	T5 (T16)	G5	165	LN 13.044	<b>564190</b>	230, 50	155	140	92	0.80	25/40	<b>A2</b>	2.0	80	
				LN 13.313*	<b>163711</b>	230, 50	85	75	34	0.32	55/80	B1	2.0	80	
<b>240 V, 50 Hz</b>															
4	T5 (T16)	G5	170	L4/6/8.404	<b>164326</b>	240, 50	85	75	34	0.32	55/80	B2	2.0	40	
2x4	T5 (T16)	G5	155	L4/6/8.404	<b>164326</b>	240, 50	85	75	34	0.32	55/80	B1	2.0	50	
6	T5 (T16)	G5	160	L4/6/8.404	<b>164326</b>	240, 50	85	75	34	0.32	55/80	B1	2.0	50	
2x6	T5 (T16)	G5	175	LN 13.413	<b>164342</b>	240, 50	85	75	34	0.32	60/90	B1	2.0	65	
8	T5 (T16)	G5	145	L4/6/8.404	<b>164326</b>	240, 50	85	75	34	0.32	55/80	B1	2.0	60	
2x8	T5 (T16)	G5	155	LN 13.413	<b>164342</b>	240, 50	85	75	34	0.32	60/90	B1	2.0	85	
13	T5 (T16)	G5	165	LN 13.413	<b>164342</b>	240, 50	85	75	34	0.32	60/90	B1	2.0	80	
<b>220 V, 60 Hz</b>															
4	T5 (T16)	G5	170	L4/6/8.218	<b>532644</b>	220, 60	85	75	34	0.32	60/80	—	2.0	40	
2x4	T5 (T16)	G5	155	L4/6/8.218	<b>532644</b>	220, 60	85	75	34	0.32	60/80	—	2.0	50	
6	T5 (T16)	G5	160	L4/6/8.218	<b>532644</b>	220, 60	85	75	34	0.32	60/80	—	2.0	50	
2x6	T5 (T16)	G5	175	L13.210	<b>520992</b>	220, 60	85	75	34	0.32	45/80	—	2.0	65	
8	T5 (T16)	G5	145	L4/6/8.218	<b>532644</b>	220, 60	85	75	34	0.32	60/80	—	2.0	60	
2x8	T5 (T16)	G5	155	L13.210	<b>520992</b>	220, 60	85	75	34	0.32	45/80	—	2.0	85	
13	T5 (T16)	G5	165	L13.210	<b>520992</b>	220, 60	85	75	34	0.32	45/80	—	2.0	80	

\* Ballasts without CE marking for replacements or markets outside of the EU