



Acciaio

ACCIAIO SDB L1500 73W 4K



Order code 41229

EAN 8002219883254






Technical specifications

Absorbed Power	73 W
Supply voltage type	AC/DC
Nominal voltage (AC)	230 Vac
Ambient temperature (min)	-20 °C
Ambient temperature (max)	40 °C
Insulation class	I
CCT light tone	4000 K
LED number	240
Out current (Qty max)	403
Photobiological risk	RG0
Atex	Yes
Atex dust	22
Atex gas	2
Colour consistency	SDCM3
CRI color rendering	>80
Driver type	SDB
Ballast	For constant current LED (DALI)
Efficiency	151 lm/W
Energy class	C
Equivalent power	2x80w
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.96
Glow wire strength	850 °C - 30s.
Inrush current	34 A
Inrush time	0.18
Lens efficiency	100%
Luminaire flux	11000 lm
Luminous flux L80B20	90000 h
Mounting	Ceiling
Nominal voltage (DC)	216 Vdc
Breaker B16 (Qty max)	25
Standby absorbed power	0.3 W
Voltage supply range (DC)	176÷276 VOLT
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

Installation and applications

Environment	Secondary Areas
Application	Offices

Mechanical specifications

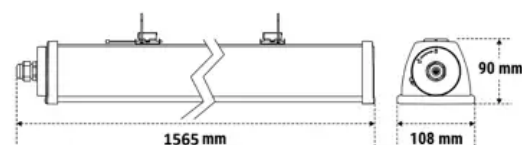

Height	80 mm
Length	1535 mm
Width	108 mm
Weight	3.9 Kg
Body material	Sheet steel epoxy coated
Colour housing	Grey RAL 7035
Cover material	Tempered glass
Reflector material	Specular Aluminium
Protection grade IP	IP66
Protection grade IK	IK07

Certifications and norms

UK SI 2021 No. 1095, EN IEC 55015:2019
+ A11:2020, EN IEC 61000-3-2 :2019, EN
61547:2009, EN 62471:2008, EN IEC
60598-1:2021, EN 60598-2-1:1989, EN
IEC 63000:2018, EN 62493:2010, EN
61000-3-3:2013

Accessories

	15019 RACCORDO DOPPIO INGRESSO M20		20122 STAFFA ORIENTABILE ACC E LED		8063 BS100 GRIGLIA PROTEZ 36/58W
	20113 SCHERMO ACC PROTEZ HCCP 1500		15018 KIT ATEX ACCIAIO ECO		15174 CONC WiFi BLE EASY BOX
	8063/1 GR STAFFA UNICA GRIGLIA 8063				

Home automation accessories

	15064 CONCENTRATORE WIFI BLE		15051 MOD AUTODIM RADIO IP65		21102 CENTRALE DOMOTICA SD- LGFM
	20104 TRASMETTITORE RADIO DOMOTICO		15050 MOD AUTODIM IP65		15074 CONC WiFi BLE ETHERNE EASY BOX

Inverter accessories

	19367 INV P&L LED SE/SA 1H 60- 180V		RA13 BOOSTER BAT LiFe 6.4V 1.5Ah		15079 MODULO LG SLIM
	15080 MODULO DALI SLIM		15037 MODULO LGFM		19399 INV UNIV CT 5W 20-240V
	19371 INV P&L LED SE/SA 3H 60- 180V		19398 INV UNIV AT RM 5W 20-240V		