

# Technical Data Sheet

CODE 45359

## VORT QBK POWER 15/15 2V 3

Belt driven cabinet fans




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Nominal Power at min speed (W)	1000
Max ambient temperature for continuous operation (°C)	40	Number of Phases (Ph)	3
Motor Class	F	Number of speeds	2
Motor IP protection	55	Voltage (V)	400
Nominal Current at max speed (A)	6,3	Max delivery at max speed (l/s)	2778
Nominal Current at min speed (A)	3,1	Max delivery at max speed (m³/h)	10000
Nominal Power at max speed (W)	3000	RPM max	960
		Sound pressure level air extraction Lp [dB (A)] 1m - max speed	78

### DIMENSIONS

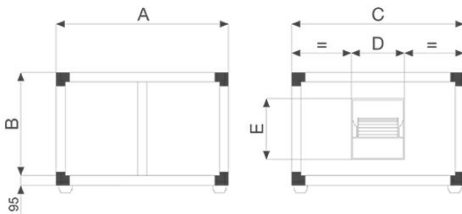

Size A (mm)	1040
Size B (mm)	1040
Size C (mm)	1040
Size D (mm)	470
Size E (mm)	405

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 45359

## VORT QBK POWER 15/15 2V 3




Belt driven cabinet fans


### DESCRIPTION

- Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene sound absorbent padding, surface finish self-adhesive metal foil, Class I.
- 2 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.
- Maximum air flow: 10,000 m<sup>3</sup>/h.


### ACCESSORIES




← QBK RRC  
POWER 15/15  
(TETTuccio)  
Code 24218



QBK VCD  
POWER 15/15  
(SERRANDA+COMANDAMENTO)



QBK IG POWER  
15/15 (GRIGLIA)  
Code 24233



QBK SS POWER  
(MICRO)  
Code 24237



#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)  
Pre & Post Vendita: fax +39 02 90699302  
Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)