

Technical Data Sheet

CODE 45285

VORT QBK COMFORT 10/10
4M 1V/1



Sound-proof double inlet cabinet fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	8,5	Number of speeds	1
Absorbed Power max (W)	1870	Voltage (V)	230
Frequency (Hz)	50	Weight (Kg)	53
Insulation Class	I°	Delivery max (l/s)	1430
Max ambient temperature for continuous operation (°C)	40	Delivery max (m³/h)	5148
Min ambient temperature for continuous operation (°C)	-20	Pressure max (mmH2O)	58,52
Motor Class	F	Pressure max (Pa)	573,9
Nominal Diameter (mm)	400	RPM	1400
Number of Phases (Ph)	1	Sound power level Lw [dB(A)]	64,8
Number of Poles	4	Sound pressure level Lp in free field [dB(A)] 1 m	56,7

DIMENSIONS

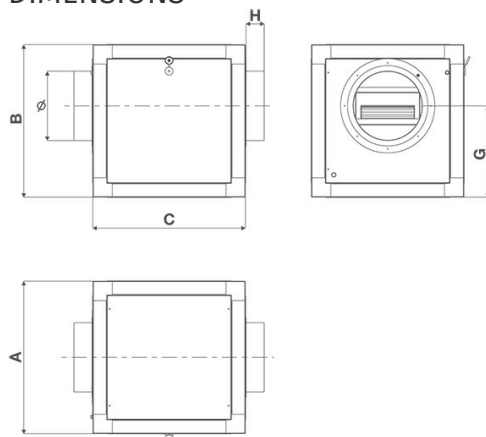

Diametro \varnothing (mm)	400
Size A (mm)	650
Size B (mm)	650
Size C (mm)	650
Size G (mm)	375
Size H (mm)	90

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45285

VORT QBK COMFORT 10/10 4M 1V/1




Sound-proof double inlet cabinet fans


DESCRIPTION

- Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and 48 mm gauge zinc-coated sheet metal panels, with mineral wool sound insulation (density 90/100 kg/m³).
- 1 speed single phase AC motor, coupled to a forward-bladed double inlet centrifugal impeller.
- 1 x inspection panel with key-lockable handle.
- 1 x inlet panel with smooth circular spigot.
- 1 x outlet panel with smooth circular spigot.

CURVES

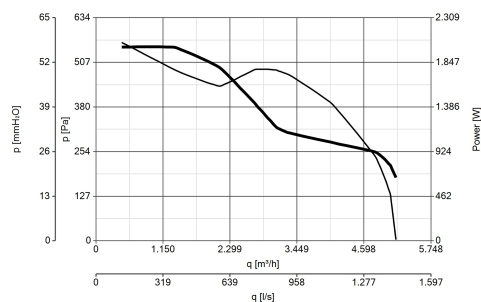

ACCESSORIES



**QBK RRC
COMFORT
10/10
(TETTUCCIO)**
Code 24213

**QBK F
COMFORT
(PIEDINI)**
Code 24247

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com