



Completa LED

COMPLETA LED 24W AT SE LIFE

Emergency luminaire with a wide range of accessories for installation flexibility



Control system AT

Order code 4211

EAN 8002219879509

Technical specifications


Supply voltage type	AC
Nominal voltage (AC)	230 Vac
Absorbed SE (max)	1.9 W
Control system	AT
Autonomy	1h, 1.5h, 2h, 3h, 8h
Battery included	Yes
Battery type	LiFe
Battery	LiFe 3.2V 1.5Ah
Charging time	12 h
Autonomy test time	60 min
Autonomy test frequency	182 days
Test frequency	28 days
Ambient temperature (min)	0 °C
Ambient temperature (max)	40 °C
Insulation class	II
CCT light tone	4000 K
LED number	24
Photobiological risk	RG0
CRI color rendering	>80
Operation mode	NM
Equivalent power	24WGL
Flux SE	450 lm, 300 lm, 230 lm, 160 lm, 70 lm
Frequency (max)	60 Hz
Frequency (min)	50 Hz
Power factor	0.05
Glow wire strength	850 °C - 30s.
Light sensor	Yes
Number of Batteries	1
Visibility distance	15 m
Voltage supply range (max)	253 V
Voltage supply range (min)	207 V

Installation and applications

Environment	Offices
Application	Offices, Industrial Areas, Public Areas

Mechanical specifications

Height	34 mm
Length	126 mm
Width	294 mm
Weight	0.5 Kg

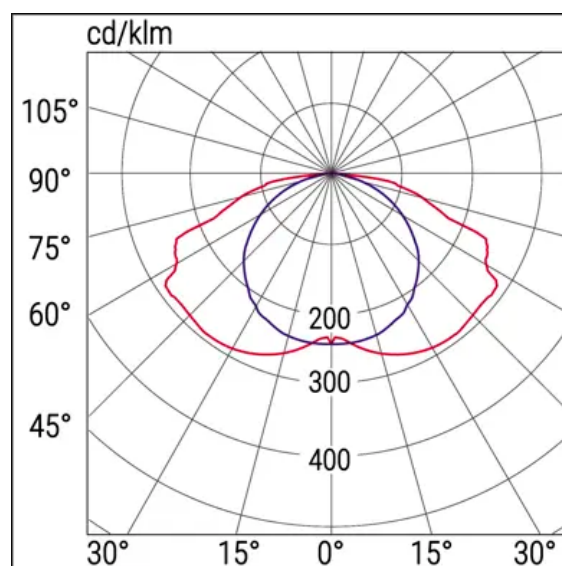

Body material	Polycarbonate
Colour housing	White RAL 9003
Cover material	Transparent polycarbonate
Diffuser finiture	Clear
Protection grade IP	IP40
Protection grade IK	IK05

Certifications and norms

UK SI 2021 No. 1095, EN 62471:2008, EN IEC 60598-1:2021, EN 60598-2-2:2012, EN 60598-2-22:2014 + AC:2015 + AC:2016-05 + AC:2016-09 + A1:2020, EN IEC 63000:2018, EN 62493:2010, EN 61000-3-3:2013, REG. 2019/2020(EU), EN IEC 55015:2019 + A11:2020

Supplied accessories



4278
ADES SX/DX/BS/UP COMP LED



3733
INCASSO STILE 6/11W 3106/IP

Accessories



4265
STAFFA PARETE X BAND
DES/COMP



3912
GRIGLIA EM 440X215X99



4268
SCHERMO BAND BASS
DES/COMP LED



4269
SCHERMI DX/SX/BS DES/COMP
LED



4112
KIT GUSCIO IP66 COMPLETA
LED



15048
MODULO RM PLUG



2730
INIBIT 973 COMANDO R.MODE



4266
STAFFA CONTROSOFFITTO
DES/COMP



4267
SCHERMO BAND DXSX
DES/COMP LED

Spare parts



415436001
LI-FEPO4 3.2V 1.5AH 18650