

GOCCIALED ECO



Logistic Data

| | |
|-----------------------------|---------------|
| Code | 21270 |
| Product | GOCCIALED ECO |
| Box quantity (pcs.) | 10/50 |
| EAN Box | 8012878212708 |
| Gross weight of box in kg | 5.39 |
| Weight of single lamp in kg | 0.107 |
| Length of box in m | 0.675 |
| Width of box in m | 0.331 |
| Height of box in m | 0.163 |
| ETIM class name | LED lamp |
| Beam angle | 270° |
| Brand of LED | EPISTAR |
| Power Factor | >0.5 |

Electrical Parameters

| | |
|------------------------------|--------|
| Lamp nominal wattage | 10 W |
| Rated wattage | 10.0 W |
| Nominal current (mA) | 88 mA |
| Energy Consumption kWh/1000h | 10 |


Light Application Parameters

| | |
|---------------------------------|--------------|
| Luminous flux | 880 lm |
| Luminous efficiency of lamp | 88 lm/W |
| Colour temperature | 3000 K |
| Colour rendering index Ra | ≥80 |
| LLMF at the end of nominal life | 0.55(20000h) |
| SDCM | 2.7 |
| Imax(cd) | 124.9 |
| Switching cycles | 20000 |

Specification

| | |
|-----------------------|---------|
| dimnable | NO |
| Energylabel from 2013 | A+ |
| Suitable for indoors | Yes |
| Application | general |
| Base | E27 |
| Lamp shape | A60 |

Colour Temperature consistency (SDCM according to Mac Adam's ellipse)

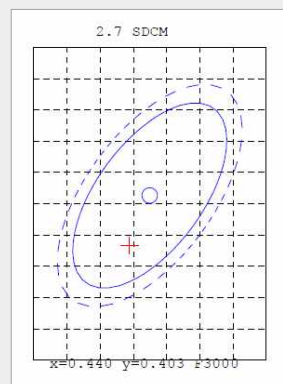

Peak of light intensity (max. cd)

