

MI6LED EVO **CRI>90**



Logistic Data

| | |
|-----------------------------|---------------|
| Code | 21511 |
| Product | MI6LED EVO |
| Box quantity (pcs.) | 10/50 |
| EAN Box | 8012878215112 |
| Gross weight of box in kg | 17.5 |
| Weight of single lamp in kg | 0.208 |
| Length of box in m | 0.62 |
| Width of box in m | 0.26 |
| Height of box in m | 0.61 |
| ETIM class name | LED lamp |
| Beam angle | 25° / 45° |
| Brand of LED | EPISTAR |
| Power Factor | >0.5 |
| Voltage | 220-240 |

Light Application Parameters

| | |
|---------------------------------|---------------|
| Luminous flux | 1120 lm |
| Luminous efficiency of lamp | 70 lm/W |
| Colour temperature | 3000 K |
| Colour rendering index Ra | ≥80 |
| LLMF at the end of nominal life | 0.88 (15000h) |
| SDCM | 2.3 |
| Imax(cd) | 1550 |
| Switching cycles | 20000 |


Specification

| | |
|-----------------------|---------|
| dimnable | NO |
| Energylabel from 2013 | A+ |
| Suitable for indoors | Yes |
| Application | general |
| Base | GU10 |
| Lamp shape | AR111 |

Electrical Parameters

| | |
|------------------------------|--------|
| Lamp nominal wattage | 16W |
| Rated wattage | 16.0 W |
| Nominal current (mA) | 77mA |
| Energy Consumption kWh/1000h | 16 |

Colour Temperature consistency (SDCM according to Mac Adam's ellipse)

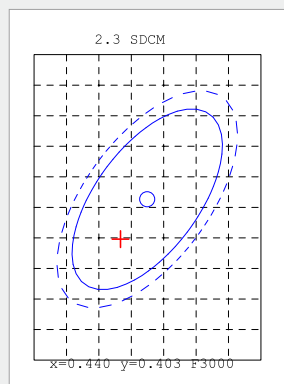

Peak of light intensity (max. cd)

