

# 240W Hyskeir Pro 2 Highbay, 840, 1-10V

Order Code: IND215v2-C10

## Photometric Data

Lumens	33800
Colour Rendering Index (CRI)	80-89
LPW (lm/W)	130
Colour Temperature (K)	4000 - 4000
SDCM	5
Beam Angle (°)	120
Light Distribution	Symmetric
Lens / Reflector	None

## Life Data


Rated Life @ 25°C (Hrs)	85000
Rated Life @ Tmax (Hrs)	50000
Rated Life L70/B10 @ 25°C	85000
Rated Life L80/B10 @ 25°C	60000
Rated Life L90/B10 @ Tmax (Hrs)	25000
Rated Life L70/B10 @ Tmax (Hrs)	50000
Rated Life L80/B10 @ Tmax (Hrs)	50000
Rated Life L90/B10 @ 25°C	25000

## Electrical Data

Thermal Overload Protection	Yes
Overvoltage Protection	Yes
Input (W)	260
Input (V)±10%	220 - 240
Voltage Type	AC
Input Current (A)	1.2
Power Factor	0.95
No. Per C16 Breaker	3
Electrical Class	I
Type of Wiring	Ending
Wiring X-sec (mm <sup>2</sup> )	Yes
1-10V Dimming	Yes
LED Nominal Current (mA)	1900 - 1900
Short Circuit Protection	Yes

## Physical Data

With Protective Cover	Yes
Degree of Protection (IP)	IP65
Mounting Method	Pendant
Housing Colour	Black
Housing Material	Aluminium
Reflector	None
Height/Depth (mm)	205
Diameter (mm)	320
Weight (kg)	5.5
Lamp Type	LED Not Exchangeable
Reflector Material	Without Reflector
Ball Proof	Yes
Impact Strength	IK08
Warranty (year)	5

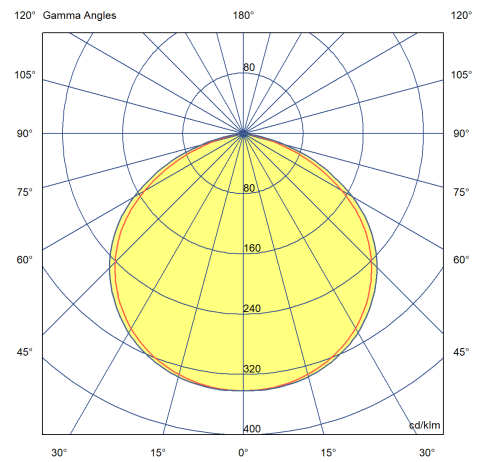

Order Code: IND215v2-C10

#### Environmental Data

Ambient Rated Temperature Range (°C)	-30 to 35
--------------------------------------	-----------

#### Accessories

ACS137 - 60° Aluminium Reflector

ACS142 - 90° Polycarbonate Reflector

ACS138 - 90° Aluminium Reflector

ACS141 - Surface Mounting Bracket

ACS140 - Programming Remote for Microwave Sensors

ACS140v2 - V2 Programming Remote for Microwave Sensors

#### Logistical Data

Item Gross Weight (kg)	6
------------------------	---

Packaging Length (cm)	39
-----------------------	----

Packaging Width (cm)	39
----------------------	----

Packaging Height (cm)	22
-----------------------	----