

# Technical Data Sheet

CODE 11422

## M 150/6" A LL

Wall/window axial fans



### Certifications



IMQ



CE



IMQ Performance



C Tick Mark



EAC




G-Mark

### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,15	Ø Discharge Hole (mm)	156
Absorbed Power max (W)	30	Voltage (V)	220-240
Frequency (Hz)	50	Weight (Kg)	1,1
Inlet	Automatico	Delivery max (l/s)	93,1
Insulation Class	II°	Delivery max (m³/h)	335
IP	X4	Pressure max (mmH2O)	6
Max ambient temperature for continuous operation (°C)	50	Pressure max (Pa)	59
Nominal Diameter (mm)	160	RPM	2100
		Sound Pressure level Lp [dB (A)] 3m	46

### DIMENSIONS

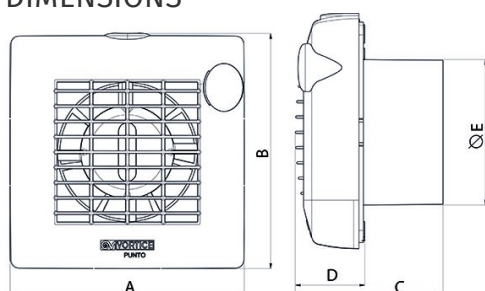

Size A (mm)	214
Size B (mm)	215
Size C (mm)	117
Size D (mm)	47
Size E (mm)	Ø
	156

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 11422

## M 150/6" A LL


Wall/window axial fans



### DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 335 m<sup>3</sup>/h.
- Equipped with system by which the louvres of the grille are opened and closed automatically.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

### CURVES

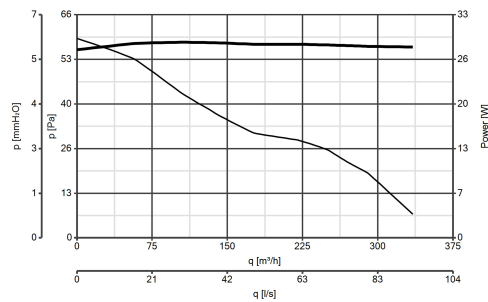

### ACCESSORIES



S 150/6  
Code 22156



F 150/6"  
Code 22133



C 1.5  
(COMANDO EL.  
1.5 A)  
Code 12966



SCNRB  
SCAT.COM.NON  
REV.INCASSO  
Code 12971

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)  
Pre & Post Vendita: fax +39 02 90699302  
Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)