

Technical Data Sheet

CODE 11449

SISTEMA HA PHANTOM 350

Ceiling-mounting residential heat recovery units




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	1,4	Delivery max (m ³ /h)	350
Absorbed Power max (W)	165	Pressure max (mmH ₂ O)	58,0
Frequency (Hz)	50	Pressure max (Pa)	568
Max ambient temperature for continuous operation (°C)	50	Sound power level - radiated L _w [dB(A)]	51,0
Nominal Diameter (mm)	150	Sound power level exhaust inlet L _w [dB(A)]	37,8
Voltage (V)	230	Sound power level supply outlet L _w [dB(A)]	37,2
Weight (Kg)	44	Sound pressure level air extraction L _p in free field [dB (A)] 3m - max speed	17,3
Delivery max (l/s)	97,0	Sound pressure level air supply L _p in free filed [dB (A)] 3m - max speed	16,7
		Sound pressure level radiated L _p in free filed [dB (A)] 3m - max speed	30,5

DIMENSIONS

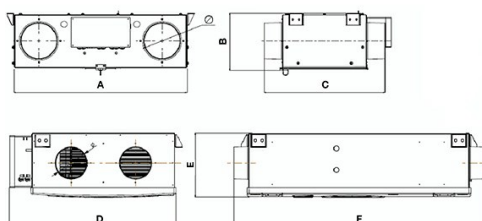

Size A (mm)	714
Size B (mm)	238
Size C (mm)	499
Size D (mm)	740
Size E (mm)	288
Size F (mm)	1287

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11449

SISTEMA HA PHANTOM 350

Ceiling-mounting residential heat recovery units




DESCRIPTION

• When used as a traditional Heat Recovery Unit, recommended operating mode when the house is occupied, VORT HA PHANTOM 200 grants the effective, quiet, low cost indoor ventilation, reducing relative humidity and CO2 concentrations. When instead operated as air purifier, suggested running mode when the house is unoccupied thanks to its patented filtering system, VORT HA PHANTOM 200 dramatically reduces concentration of live bacteria, NOX, VOC and CO, at the same time halving usual operating costs. .

• VORT HA PHANTOM 200 BP is equipped with:
o 2 M5 filters effective against PM10 usually present in fresh outdoor air (the F7 filter, available as optional, on supply grants an even more effective action).
o A patented filter effective against bacteria, NOX, VOC and CO.
• Noise levels, consumptions and performances remain the same of stand alone VORT HRI PHANTOM 350 BP.

CURVES

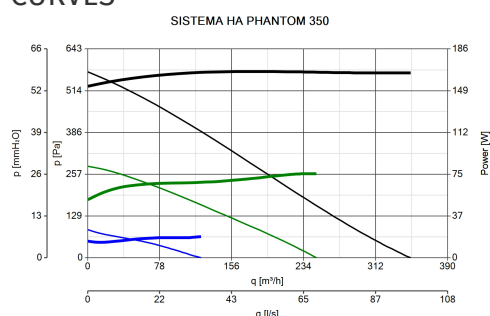


ACCESSORIES



C PIR
Code 12998



DCW 250
D.150(BATTERIA
FREDDA)
Code 24146



FTR F7
230X250X48
Code 22628



PANNELLO
INSTALLATORE
SKP10
Code 22629

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com