

Technical Data Sheet

CODE 11698

M 150/6" AT HCS LL

Wall/window axial fans



Certifications



IMQ



CE



IMQ Performance




EAC

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,15	Voltage (V)	220-240
Absorbed Power max (W)	30	Weight (Kg)	1,1
Frequency (Hz)	50	Delivery max (l/s)	93,1
Insulation Class	II°	Delivery max (m³/h)	335
IP	X4	Pressure max (mmH2O)	6
Max ambient temperature for continuous operation (°C)	50	Pressure max (Pa)	59
Nominal Diameter (mm)	160	RPM	2100
Ø Discharge Hole (mm)	156	Sound Pressure level Lp [dB (A)] 3m	46

DIMENSIONS

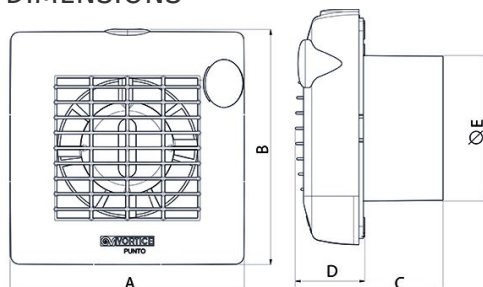

Size A (mm)	214
Size B (mm)	215
Size C (mm)	117
Size D (mm)	47
Size E (mm)	Ø
	156

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 11698

M 150/6" AT HCS LL

Wall/window axial fans




DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 150 mm.
- Motor protected against thermal overload, with shaft turning in ball bearings (LL), coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 335 m³/h.
- Electronic pcb with humidistat function piloted by RH sensor (4 preset thresholds: 60%, 70%, 80%, 90%, selectable during installation),

- designed to switch on the fan automatically. The pcb incorporates an electronic timer that shuts off the motor automatically when relative humidity returns below the threshold value. The timer setting is selectable during installation in the range 3'-20' (default setting 3').
- Equipped with system by which the louvres of the grille are opened and closed automatically.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

CURVES

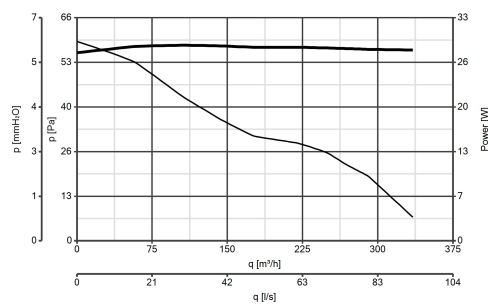

ACCESSORIES



F 150/6"

Code 22133



S 150/6"

Code 22156

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com