

Technical Data Sheet

CODE 12452

VORTICE 230/9" AR

Wall/window axial fans



Certifications



IMQ



CE



IMQ Performance



EAC




G-Mark

TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,13	Voltage (V)	220-240
Absorbed Power max (W)	26	Weight (Kg)	3,45
Frequency (Hz)	50/60	Delivery max - Extract (l/s)	133
Inlet	Automatico	Delivery max - Extract (m3/h)	480
Insulation Class	II°	Delivery max - Intake (l/s)	86
IP	X4	Delivery max - Intake (m3/h)	310
Max absorbed Power at 60Hz (W)	26	Delivery max (m³/h)	480
Max ambient temperature for continuous operation (°C)	50	RPM	790
Max ambient temperature for continuous operation 60Hz (°C)	50	Rpm - Exhaust	790
Ø Discharge Hole (mm)	230	Rpm - Supply	1080
		Sound Pressure level Lp [dB (A)] 3m	35,6

DIMENSIONS

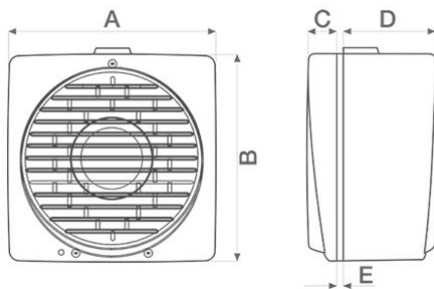

Ø glass hole	257/262
Ø wall hole	257/262
Size A (mm)	294
Size B (mm)	297
Size C (mm)	31
Size D (mm)	130
Size E (mm)	2/38

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 12452

VORTICE 230/9" AR

Wall/window axial fans




DESCRIPTION

- Model designed for window/wall mounted installation.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 230 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

CURVES


□

ACCESSORIES



KIT TE 230/9"
(TORRETTA)

Code 13002



KIT SA 230/9"
**(SCHERMO
ANTILUCE)**

Code 13004



KIT MU (MURO)

Code 13018



KIT VV 230/9"
(DOPPI VETRI)

Code 13022

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com