

Technical Data Sheet

CODE 15039

TORRETTA TRM 10 ED 4P

Centrifugal roof fans with horizontal discharge for hot fumes extraction




CE



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,46	Number of Poles	4
Absorbed Power max (W)	110	Voltage (V)	220-240
Frequency (Hz)	50	Weight (Kg)	18,5
Insulation Class	I°	Delivery max (l/s)	278
Max ambient temperature for continuous operation (°C)	90	Delivery max (m³/h)	1000
Motor IP protection	55	Pressure max (mmH2O)	20
Nominal Diameter (mm)	200	Pressure max (Pa)	196
Number of Phases (Ph)	1	RPM	1395
		Sound Pressure level Lp [dB (A)] 3m	56

DIMENSIONS

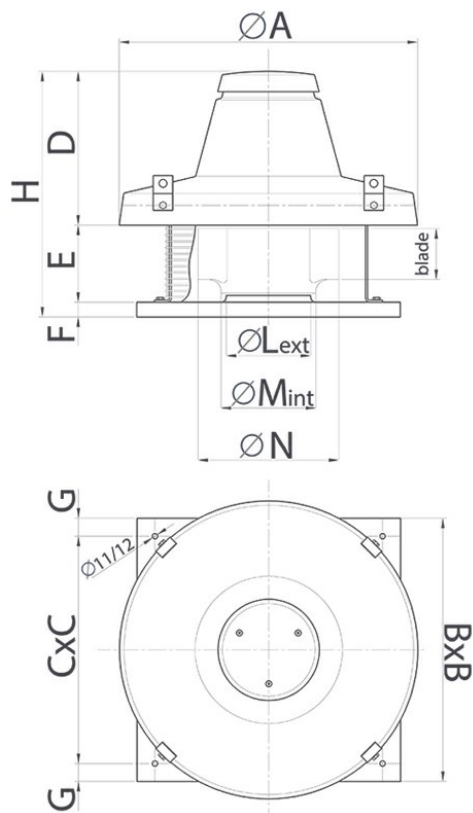

Size A (mm)	600
Size B (mm)	410
Size C (mm)	357
Size D (mm)	309
Size E (mm)	166
Size F (mm)	38
Size G (mm)	26,5
Size H (mm)	513
Size L (mm)	183
Size M (mm)	187,5
Size N (mm)	284

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 15039

TORRETTA TRM 10 ED 4P


Centrifugal roof fans with horizontal discharge for hot fumes extraction



DESCRIPTION

- Centrifugal roof fan suitable for extracting hot fumes at up to 400 °C for 120 minutes.
- Base manufactured from phosphated pressed steel, epoxy powder coated to atmospheric agents.
- Aerodynamically contoured inlet port for optimum performance, fashioned as a single unit with the base and gauged to optimize air flow.
- Motor mounting plate made of steel with galvanization surface treatment.
- Pressed steel motor cover: pickled and phosphated surface, polyester coated to atmospheric agents.
- Accident prevention and anti-bird grilles (to UNI ISO 13857 standard), consisting of electrically welded steel rings with epoxy powder coated surface.
- Centrifugal impeller with self-cleaning backward curved blades, dynamically balanced (UNI ISO 1940, Point 1 - Class 6.3), made of electrolytically galvanized pressed steel.
- 1 speed single phase AC motor with shaft turning in ball bearings, size 80, with metal cooling fan and cable gland.
- Equipped with a motor start capacitor that must be installed remotely from the fan so that it cannot be damaged through direct exposure to heat.
- Galvanized steel eye lugs for transport and lifting/handling operations.
- Cable guaranteeing continuity of earth connection.
- Steel safety wire for anchoring the appliance once installed.


CURVES

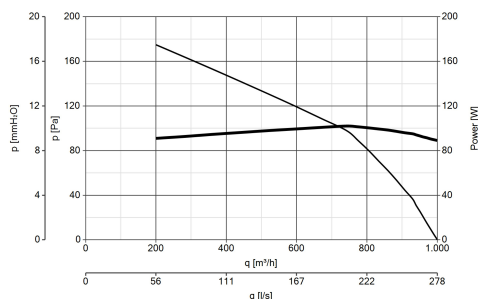

ACCESSORIES


IRM 30

Code 12921



TR-CU 10/15
(CONTROTELAIO
DI BASE U.)

Code 22511



TR-G 10/15
(GRIGLIA DI
PROTEZIONE)

Code 22700



IREM 3 CD
99250080

Code 12931

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premando 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com