

# Technical Data Sheet

CODE 15072

## TORRETTA TRT 70 E 6P

Centrifugal roof fans with horizontal discharge




### Certifications



### TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	1,30	Number of Poles	6
Absorbed Power max (W)	600	Voltage (V)	400
Frequency (Hz)	50	Weight (Kg)	80
Insulation Class	I°	Delivery max (l/s)	1944
Max ambient temperature for continuous operation (°C)	90	Delivery max (m³/h)	7000
Motor IP protection	55	Pressure max (mmH2O)	38
Nominal Diameter (mm)	400	Pressure max (Pa)	373
Number of Phases (Ph)	3	RPM	950
		Sound Pressure level Lp [dB (A)] 3m	74

### DIMENSIONS

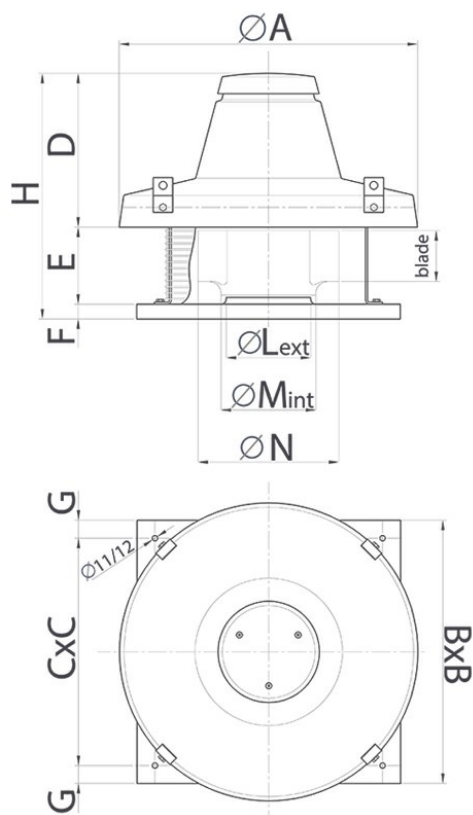

Size A (mm)	1015
Size B (mm)	830
Size C (mm)	750
Size D (mm)	449
Size E (mm)	283
Size F (mm)	38
Size G (mm)	40
Size H (mm)	770

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 15072

## TORRETTA TRT 70 E 6P

Centrifugal roof fans with horizontal discharge



### DESCRIPTION

- Base manufactured from phosphated pressed steel, epoxy powder coated with hammered effect finish, guaranteeing long-term resistance to atmospheric agents.
- Aerodynamically contoured inlet port for optimum performance, fashioned as a single unit with the base and gauged to optimize air flow.
- Pressed steel motor cover: pickled and phosphated surface, polyester powder coated and oven baked finish, colour grey, with hammered texture.
- Accident prevention and anti-bird grilles (to UNI ISO 13857 standard), consisting of electrically welded steel rings with epoxy powder coated finish, colour black.
- Centrifugal impeller with self-cleaning backward curved steel blades, hot-dip galvanized and dynamically balanced (UNI ISO 1940, Point 1 – Class 6.3), and splined aluminium hub.
- 1 speed three phase AC motor, insulation class F, with shaft turning in double shielded ball bearings.
- Maximum airflow: 7000 m<sup>3</sup>/h
- Motor and fan designed for operation in ambient temperatures higher than 65 °C.
- Cooling fan for better dissipation of heat
- Galvanized steel eye lugs for transport and lifting/handling operations.
- Cable guaranteeing continuity of earth connection.
- Steel safety wire for anchoring the appliance once installed.
- Vortice speed controller.

### ACCESSORIES




**IRT 35**

Code 12924



**IRET 6**

Code 12934



**TR-G 70/100  
(GRIGLIA DI  
PROTEZIONE)**

Code 22506



**TR-B 70/100  
(BOCCAGLIO  
ASPIRAZIONE)**

Code 22508

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)