

Technical Data Sheet

CODE 45287

VORT QBK COMFORT 12/12 6T 1V/1



Sound-proof double inlet cabinet fans




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	3,1	Number of Poles	6
Absorbed Power max (W)	1600	Number of speeds	1
Frequency (Hz)	50	Voltage (V)	230/400
Insulation Class	I°	Weight (Kg)	73
Max ambient temperature for continuous operation (°C)	50	Delivery max (l/s)	2112
Min ambient temperature for continuous operation (°C)	-20	Delivery max (m³/h)	7604
Motor Class	B	Pressure max (mmH2O)	41,73
Motor IP protection	20	Pressure max (Pa)	409,2
Nominal Diameter (mm)	450	RPM	900
Number of Phases (Ph)	3	Sound power level Lw [dB(A)]	71,2
		Sound pressure level Lp in free field [dB(A)] 1 m	63,1

DIMENSIONI

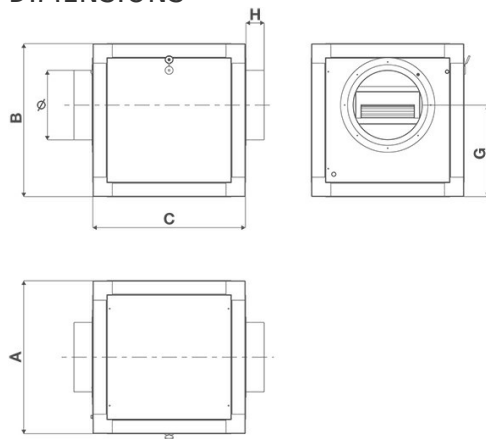

Diametro \emptyset (mm)	450
Size A (mm)	750
Size B (mm)	750
Size C (mm)	750
Size G (mm)	450
Size H (mm)	90

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45287

VORT QBK COMFORT 12/12 6T 1V/1




Sound-proof double inlet cabinet fans


DESCRIPTION

- Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and 48 mm gauge zinc-coated sheet metal panels, with mineral wool sound insulation (density 90/100 kg/m³).
- 1 speed three-phase AC motor, coupled to a forward-bladed double inlet centrifugal impeller.
- 1 x inspection panel with key-lockable handle.
- 1 x inlet panel with smooth circular spigot.
- 1 x outlet panel with smooth circular spigot.

CURVES

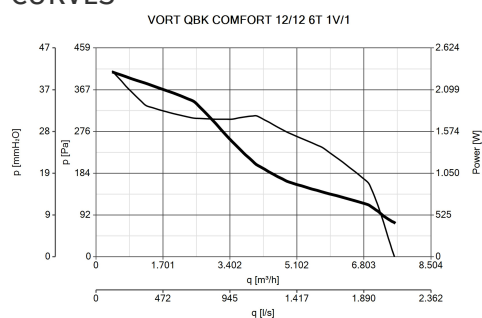

ACCESSORIES



**QBK RRC
COMFORT
12/12
(TETTUCCIO)**
Code 24214

**QBK F
COMFORT
(PIEDINI)**
Code 24247

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com