

Technical Data Sheet

CODE 45312

VORT QBK POWER 12/12 1V
0,75

Belt driven cabinet fans



Certifications



CE




EAC

TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Number of Phases (Ph)	3
Max ambient temperature for continuous operation (°C)	40	Number of speeds	1
Motor Class	F	Voltage (V)	230/400
Motor IP protection	55	Delivery max (l/s)	1389
Nominal Current (A)	1,93	Delivery max (m³/h)	5000
Nominal Power (W)	750	RPM max	735
		Sound pressure level air extraction Lp [dB (A)] 1m - max speed	68

DIMENSIONS

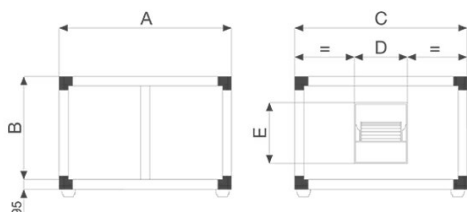

Size A (mm)	1040
Size B (mm)	790
Size C (mm)	790
Size D (mm)	395
Size E (mm)	340

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45312

VORT QBK POWER 12/12 1V 0,75






Belt driven cabinet fans

DESCRIPTION

- Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene sound absorbent padding, surface finish self-adhesive metal foil, Class I.
- 1 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.
- Maximum air flow: 5,000 m³/h.

ACCESSORIES



←

**QBK RRC
POWER 12/12
(TETTO)**
Code 24217

**QBK VCD
POWER 12/12
(SERRANDA+COMANDO)**
Code 24224

**QBK IG POWER
12/12 (GRIGLIA
MISORAZIONE)**
Code 24232

**QBK SS POWER
(MICRO)**
Code 24237

→

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)
Pre & Post Vendita: fax +39 02 90699302
Email prevendita: prevendita@vortice-italy.com