

# Technical Data Sheet

CODE 45321

## VORT QBK POWER 18/18 1V 2,2

Belt driven cabinet fans



### Certifications



CE




EAC

### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Number of Phases (Ph)	3
Max ambient temperature for continuous operation (°C)	40	Number of speeds	1
Motor Class	F	Voltage (V)	230/400
Motor IP protection	55	Delivery max (l/s)	3889
Nominal Current (A)	4,84	Delivery max (m³/h)	14000
Nominal Power (W)	2200	RPM max	730
		Sound pressure level air extraction Lp [dB (A)] 1m - max speed	79

### DIMENSIONS

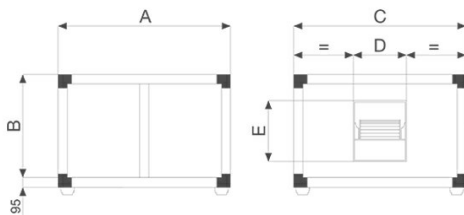

Size A (mm)	1290
Size B (mm)	1290
Size C (mm)	1290
Size D (mm)	560
Size E (mm)	480

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 45321

## VORT QBK POWER 18/18 1V 2,2




Belt driven cabinet fans


### DESCRIPTION

- Cabinet fabricated from extruded aluminium angle sections (UNI 9006) and zinc-coated sheet metal panels, insulated with polyethylene sound absorbent padding, surface finish self-adhesive metal foil, Class I.
- 1 speed three-phase AC motor, coupled by way of belt and pulley drive to a forward-bladed double inlet centrifugal impeller.
- Maximum air flow: 14,000 m<sup>3</sup>/h.


### ACCESSORIES




← QBK RRC  
POWER 18/18  
(TETTUCCIO)  
Code 24219



QBK VCD  
POWER 18/18  
(SERRANDA+COMANDO)



QBK IG POWER  
18/18 (GRIGLIA  
(SERRANDA+COMANDO))  
Code 24234



QBK SS POWER  
(MICRO)  
Code 24237



#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)  
Pre & Post Vendita: fax +39 02 90699302  
Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)