

Technical Data Sheet

CODE 45649

VORT JET-A 400/2

Impulse jet fans (axial)



Certifications


CE CE

EFECTIS


TECHNICAL AND PERFORMANCE DATA

Absorbed power 1st speed (W)	300	Airflow speed at max speed (m/s)	18,2
Frequency (Hz)	50	Airflow speed at min speed (m/s)	9,3
Max. absorbed Current at max. speed (A)	2,99	Classificazione resistenza al fuoco	F300-120
Max. absorbed Current at min. speed (A)	0,96	Delivery 1st speed (m ³ /h)	4.100
Max. absorbed power at max speed (W)	1320	Max delivery at max speed (m ³ /h)	8.200
Number of Poles	2 / 4	Reversibilit�	NO
Voltage (V)	400	Sound pressure level Lp [dB (A)] 1m - max speed	63
Weight (Kg)	90	Sound pressure level Lp [dB (A)] 1m - min speed	50
		Thrust (N)	50 / 13

DIMENSIONS

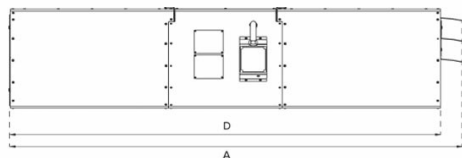

Size A (mm)	2087
Size B (mm)	488
Size C (mm)	659
Size D (mm)	2001
Size E (mm)	562
Size F (mm)	560



PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 45649

VORT JET-A 400/2

Impulse jet fans (axial)



DESCRIPTION

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com