

Technical Data Sheet

CODE 70909

EASY DRY MANUAL

Automatic and manual hair and hand dryers




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	8	Shock resistance rating (IK)	09
Absorbed Power max (W)	1800	Voltage (V)	220-240
Frequency (Hz)	50/60	Weight (Kg)	3,1
Insulation Class	II°	Delivery max (l/s)	37,5
IP	X4	Delivery max (m³/h)	135
Motor Power (W)	70/85	Power in stand-by mode (W)	0,501
		Sound pressure level Lp [dB (A)] 1m	61

DIMENSIONS

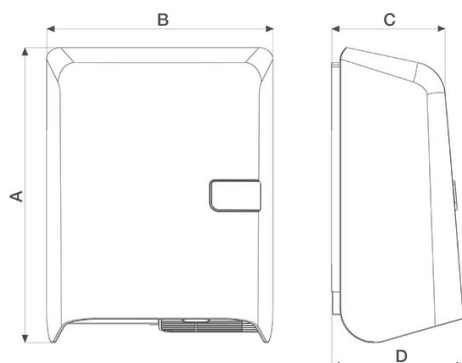

Size A (mm)	346
Size B (mm)	265
Size C (mm)	133
Size D (mm)	155

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 70909

EASY DRY MANUAL

Automatic and manual hair and hand
dryers



DESCRIPTION

- Front cover made of shockproof, UV-resistant plastic (ABS); closure system with allen screw.
- Rear flange moulded in self-extinguishing polypropylene (PP).
- Lower grille and mesh filter moulded in plastic resin (PC).
- Induction motor with thermal overload cutout, coupled to centrifugal impeller.
- Heating element protected by 2 devices: thermal fuse and resettable thermal overload limiter.
- Dryer operated manually by push button. Equipped with electronic timer designed to shut off the fan motor automatically after a set interval, selectable during installation in the range '1'-8'.
- Possibility of connection to an external coin box equipped or not with timer.
- IMQ safety certification.

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com