



EASY DRY RANGE

Automatic and manual hair and hand dryers

Wall-mounted hair dryers especially suited to heavy duty use in public areas such as gym changing rooms, swimming pools, saunas, etc.

- Modern design by D. Piva.
- Vandal-resistant
- Can be connected to an external coin collector.
- Compliant with the requirements of European Regulation No. 1275/2008/EU



EASY DRY AUTO cod. 70904



"Cassette" type lower filtering grille



EASY DRY MANUAL, push-button operated, air supply can be programmed from 1 to 8 minutes using a trimmer inside the product.

EASY DRY MANUAL cod. 70909

Tested to work even in contact with water jets and therefore are compatible with Zone 1 bathroom installation.

TECHNICAL FEATURES

- 2 models: manual and automatic.
- Front covers made of white shock-proof plastic resin (PC-ABS) with anti-UV treatment, closing system with Allen key for protection against tampering. Its particular geometry without any surfaces where cigarettes or other potentially dangerous objects can be set down safeguards users and product durability. The perimeter gasket at the edges of the appliance in contact with the installation wall helps prevent progressive build-up on the wall caused by the dust suctioned by the appliance.
- Wall flanges made of plastic resin with a mineral-based additive to dampen vibrations and soften noise.
- Lower "cassette" type filtering grille made of heat-resistant plastic resin (PC) includes mesh filters moulded in the same material.
- High-efficiency centrifugal fans powered by a thermally protected induction motor.
- Heating elements protected with thermal fuse and resettable thermal cut-out.
- EASY DRY MANUAL. Start button made of shock-proof plastic resin (PC) with anti-UV treatment. Operating cycle timer can be set at installation from 1-8 minutes using a trimmer inside the product.
- EASY DRY AUTO. Infra-red device sensor that starts/stops the product automatically. Activation range can be set at installation from 0-35 cm using a trimmer inside the product.
- Vandal-resistant feature built into the control electronics to automatically stop the product after about 10" of continuous operation. Appliance can be restarted about 10" from removal of any obstacles previously placed at the sensor.
- Safety certified by third party entity (CE).
- Protection rating from dust and water: IPX4.
- Class of electrical insulation: II (earthing not required).






EASY DRY RANGE

Automatic and manual hair and hand dryers

TECHNICAL DATA

MODELS	CODE	V~50/60HZ	W		A MAX	MAX AIRFLOW		Lp dB(A) 1 m	W STAND-BY	IK	KG
			TOTAL	MOTOR		m³/h	l/s				
EASY DRY AUTO	70904	220-240	1800	70/85	8	190	37.5	61	0.4900	9	3.1
EASY DRY MANUAL	70909	220-240	1800	70/85	8	135	37.5	61	0.5010	9	3.1

DIMENSIONS

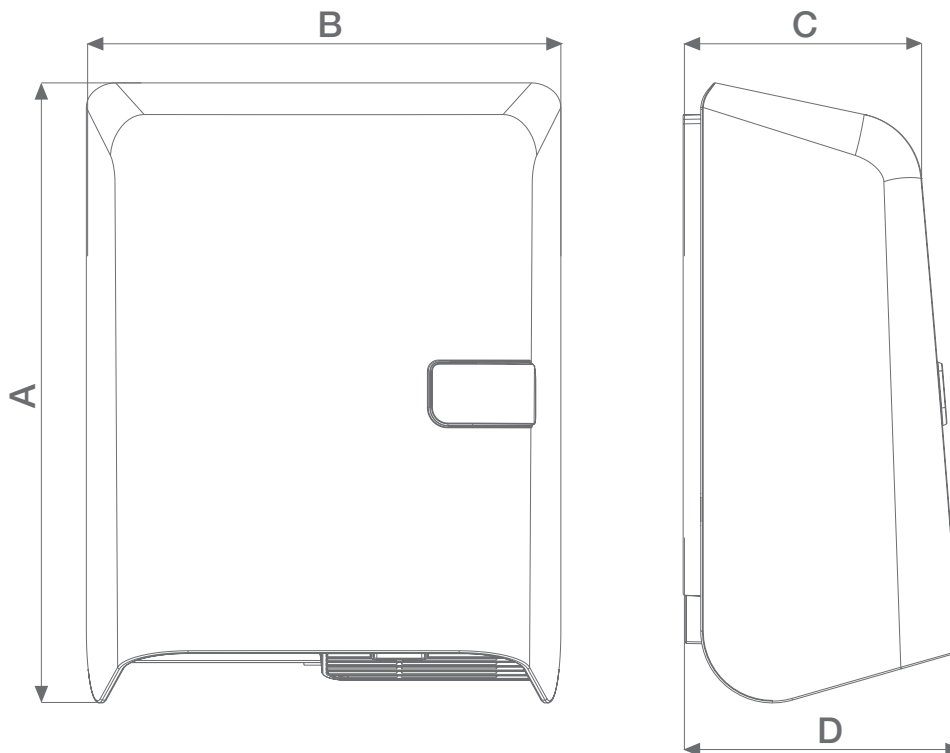

MODELS	CODE	A	B	C	D
EASY DRY AUTO	70904	346	265	133	155
EASY DRY MANUAL	70909	346	265	133	155

Dimensions (mm)